

# TWO POST I10

*Engineered to perform... Built to last!*



Powder coat finish;  
more durable than  
conventional finishes

Padded shut-off bar to  
prevent damage caused by  
lifting a vehicle too high

Adapter storage  
bracket included  
with lift purchase

Two heavy-duty  
Direct-Pull™  
hydraulic cylinders  
designed to  
minimize  
down-time by  
requiring little  
maintenance



Shown: Model I10N000  
with 3-stage front arms  
10,000 lbs. capacity



**Two-Post  
I10N000  
is Gold  
Certified**

## Engineering Excellence

Forward's U.S. engineers have over 29 years of combined experience designing automotive lifts for service and repair shops. Forward's philosophy is to own our designs rather than use someone else's off the shelf product.

## Product Integrity

21st century design tools allow us to create, control and validate our designs to ensure maximum performance. Forward lifts are rigorously tested to meet quality and durability standards. All product families are proof load tested to 1½ times rated capacity and rigorously cycle tested.

## Spot-Rite™ 3-Stage Front Arms



Allows the I10 to  
accommodate vehicles  
both asymmetrically  
and symmetrically.

**FORWARD  
LIFT**


## I10 Series Features:

- 10,000 lbs. capacity for raising most passenger cars, trucks and vans.
- The I10 is certified by ALI.
- Hydraulic cylinders in each column:
  - › Direct pull lifting technology
  - › Top mounted
  - › Full stroke
  - › Cylinder rod concealed inside carriage
- Overhead cable equalization.
- Single point release lock
- Large rubber-padded swivel adapters with extra height extensions are standard.
- Spring operated arm restraints, disengage at floor level.
- Padded overhead height limit switch bar.
- Spot-Rite 3-stage front arm design enables you to position doors in front of column or behind, to avoid door damage.
- Adapter storage bracket kit
- Special truck adapters
- Durable powder coat finish - standard color of lift is blue with yellow arms. Red lift with yellow arms is available.




## Available Options:

- Air/Electric work station with air regulator and oiler

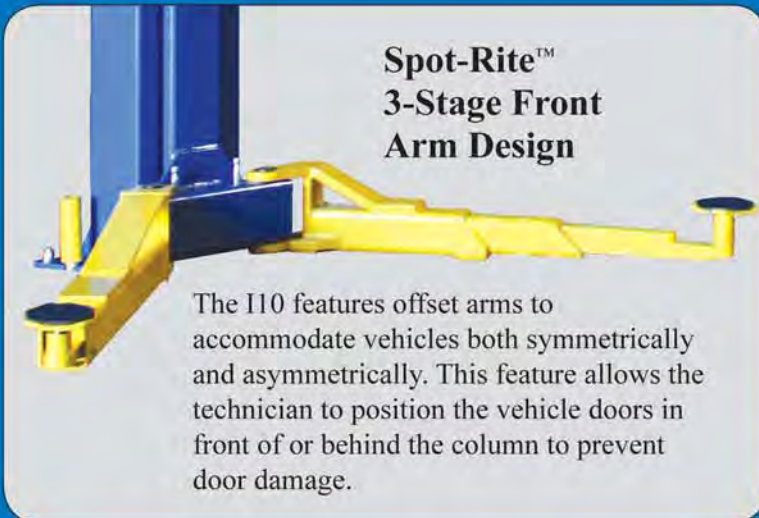

### Spot-Rite™ 3-Stage Front Arm Design

The I10 features offset arms to accommodate vehicles both symmetrically and asymmetrically. This feature allows the technician to position the vehicle doors in front of or behind the column to prevent door damage.

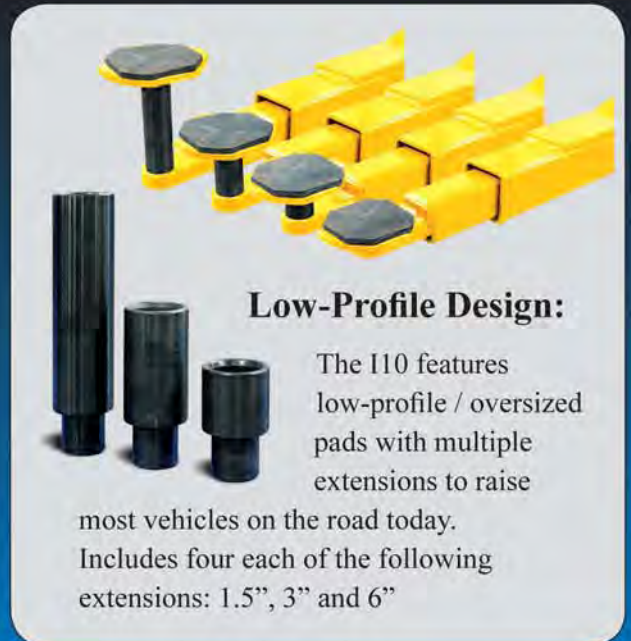

### Low-Profile Design:

The I10 features low-profile / oversized pads with multiple extensions to raise most vehicles on the road today. Includes four each of the following extensions: 1.5", 3" and 6"

Specifications	I10
Capacity	10,000 lbs. (4536kg)
Overall Height	143-1/8" (3635mm)
Height to Shut-Off	136-1/4" (3461mm)
Minimum Ceiling Height	144" (3658mm)
Minimum Lifting Height	3-5/8" (93mm)
Maximum Lifting Height	77" (1956mm)
Overall Floor Width	131" (3327mm) or optional 137" (3479mm)
Inside Column Width	109-3/4" (2787mm) or optional 115-3/4" (2940mm)
Drive Through	97" (2463mm) or optional 103" (2616mm)
Adapter Heights	1-1/2" (38mm), 3" (76mm), and 6" (152mm)
Voltage	220v
Amps	20
Motor	2 HP

Specifications subject to change without notice or liability



Forward Lift  
996 Industrial Drive  
Madison, IN 47250

Phone: 800.423.1722  
Fax: 812.273.7329  
www.forwardlift.com



Lit# Forward I10\_2011.04

©2011 Forward Lift, Forward Lift is a brand of Vehicle Service Group, A Dover Company. All rights reserved. Unless otherwise indicated, Forward Lift, Vehicle Service Group, Dover and all other trademarks are property of Dover Corporation and its affiliates.